


## 3<sup>rd</sup> Generation 1200V/5A SiC Schottky Barrier Diode

### Features

- AEC-Q101 qualified
- Revolutionary semiconductor material - Silicon Carbide (SiC)
- No reverse recovery
- High-speed switching performance
- Temperature-independent switching behavior
- System cost / size savings due to reduced cooling requirements
- Junction temperature range from -55°C to 175°C
- RoHS compliant

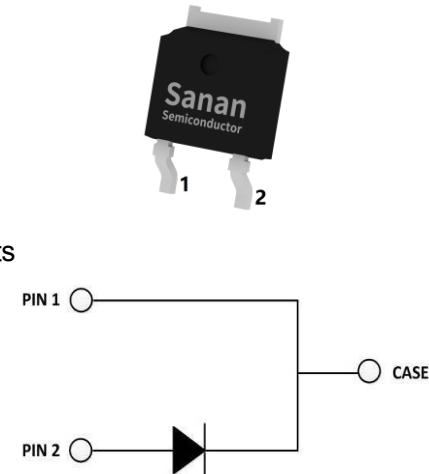

### Potential Applications

- DC/DC converter for EV/HEV
- On board charger (OBC)

**Package Type: TO-252-2L**

### Description



The ADS120J005D3 SiC Schottky Barrier Diode (SBD) has been developed using Sanan's advanced 3<sup>rd</sup> generation SiC SBD technology with the highest performance and reliability. It registers higher efficiency, higher operation temperature and lower loss and can be operated at higher frequency than Si-based solutions. As to the Schottky structure, it shows no recovery at turn-off and allows a low leakage current with reverse voltage up to 1200V. It can contribute to system miniaturization and achieve lightweight system design. Using RoHS compliant components and being AEC-Q101 qualified, it is qualified for use in automotive application.

### Product Specifications

Device	V <sub>RRM</sub>	I <sub>F</sub> (135°C)	V <sub>F</sub> (25°C)	Q <sub>c</sub>	Marking
ADS120J005D3	1200V	10A	1.35V	28nC	DS120005D3

## CONTENTS

<b>Features.....</b>	<b>1</b>
<b>Potential Applications.....</b>	<b>1</b>
<b>Description.....</b>	<b>1</b>
<b>Product Specifications .....</b>	<b>1</b>
<b>Table 1 Maximum Ratings.....</b>	<b>3</b>
<b>Table 2 Thermal Resistance.....</b>	<b>3</b>
<b>Table 3 Static Electrical Characteristics.....</b>	<b>4</b>
<b>Table 4 Dynamic Electrical Characteristics .....</b>	<b>4</b>
<b>Electrical Characteristic Diagrams.....</b>	<b>5</b>
<b>Package Information.....</b>	<b>7</b>
<b>Recommended Solder Pad Layout.....</b>	<b>8</b>
<b>Ordering Information .....</b>	<b>8</b>
<b>Important Notices – Read Carefully .....</b>	<b>9</b>
<b>Warning .....</b>	<b>9</b>

**Table 1. Maximum Ratings**(T<sub>c</sub> = 25°C, unless otherwise specified)

Parameter	Symbol	Value	Unit	Test conditions
Repetitive peak reverse voltage	V <sub>RRM</sub>	1200	V	T <sub>c</sub> = 25°C
Surge peak reverse voltage	V <sub>RSM</sub>	1200		T <sub>c</sub> = 25°C
DC reverse voltage	V <sub>DC</sub>	1200		T <sub>c</sub> = 25°C
Continuous forward current	I <sub>F</sub>	22	A	T <sub>c</sub> = 25°C
		10		T <sub>c</sub> = 135°C
		5		T <sub>c</sub> = 155°C
Surge non-repetitive forward current	I <sub>FSM</sub>	55	A	T <sub>c</sub> = 25°C, t <sub>p</sub> = 10ms, half sine pulse
Non-repetitive peak forward current	I <sub>F,Max</sub>	350	A	T <sub>c</sub> = 25°C, t <sub>p</sub> = 10μs, pulse
Surge repetitive forward current	I <sub>FRM</sub>	40	A	T <sub>c</sub> = 25°C, t <sub>p</sub> = 10ms, half sine wave D = 0.1
Power dissipation	P <sub>tot</sub>	134	W	T <sub>c</sub> = 25°C
i <sup>2</sup> t value	∫i <sup>2</sup> dt	15	A <sup>2</sup> s	T <sub>c</sub> = 25°C, t <sub>p</sub> = 10ms
Operating junction temperature	T <sub>j</sub>	-55~175	°C	
Storage temperature	T <sub>stg</sub>	-55~175	°C	

**Table 2. Thermal Resistance**

Parameter	Symbol	Values			Unit	Test condition
		Min.	Typ.	Max.		
Thermal resistance from junction to case	R <sub>th(j-c)</sub>	/	1.12	/	°C/W	

**Table 3. Static Electrical Characteristics**(T<sub>j</sub> = 25°C, unless otherwise specified)

Parameter	Symbol	Values			Unit	Test conditions
		Min.	Typ.	Max.		
DC blocking voltage	V <sub>DC</sub>	1200	/	/	V	I <sub>R</sub> = 100 µA
Forward voltage	V <sub>F</sub>	/	1.35	1.50	V	I <sub>F</sub> = 5A, T <sub>j</sub> = 25°C
		/	1.85	2.20		I <sub>F</sub> = 5A, T <sub>j</sub> = 175°C
Reverse current	I <sub>R</sub>	/	1	20	µA	V <sub>R</sub> = 1200V, T <sub>j</sub> = 25°C
		/	3	80		V <sub>R</sub> = 1200V, T <sub>j</sub> = 175°C

**Table 4. Dynamic Electrical Characteristics**(T<sub>j</sub> = 25°C, unless otherwise specified)

Parameter	Symbol	Values			Unit	Test conditions
		Min.	Typ.	Max.		
Total capacitance	C	/	400	/	pF	V <sub>R</sub> = 0V, f = 1MHz
		/	27	/		V <sub>R</sub> = 400V, f = 1MHz
		/	20	/		V <sub>R</sub> = 800V, f = 1MHz
Total capacitive charge	Q <sub>C</sub>	/	28	/	nC	V <sub>R</sub> = 800V
Capacitance stored energy	E <sub>C</sub>	/	8.2	/	µJ	V <sub>R</sub> = 800V

## Electrical Characteristic Diagrams

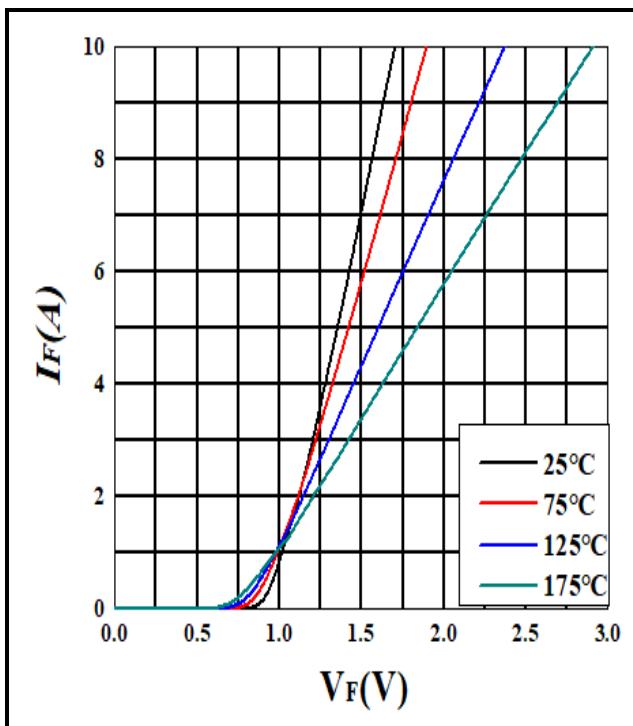


Figure 1. Forward characteristics

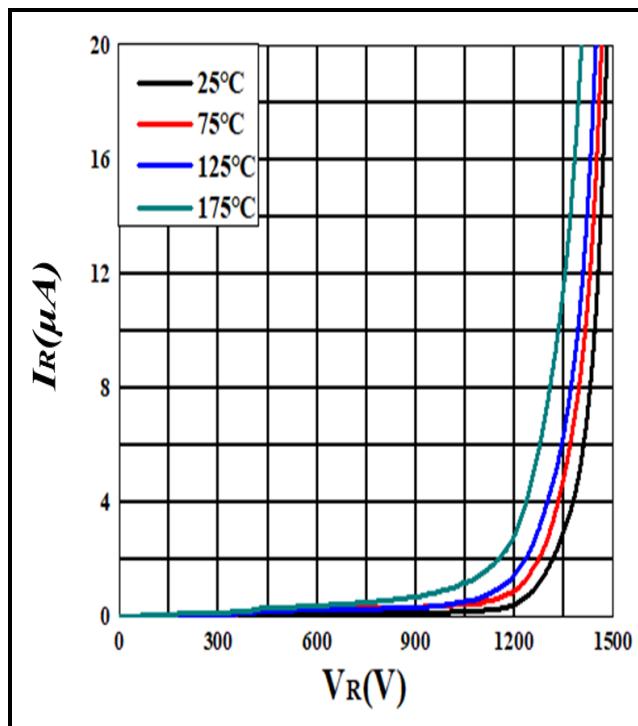


Figure 2. Reverse characteristics

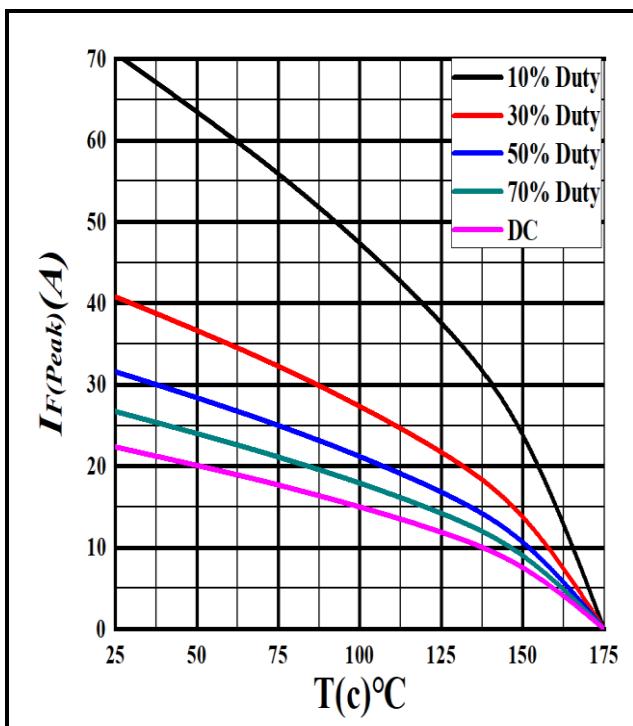


Figure 3. Current derating

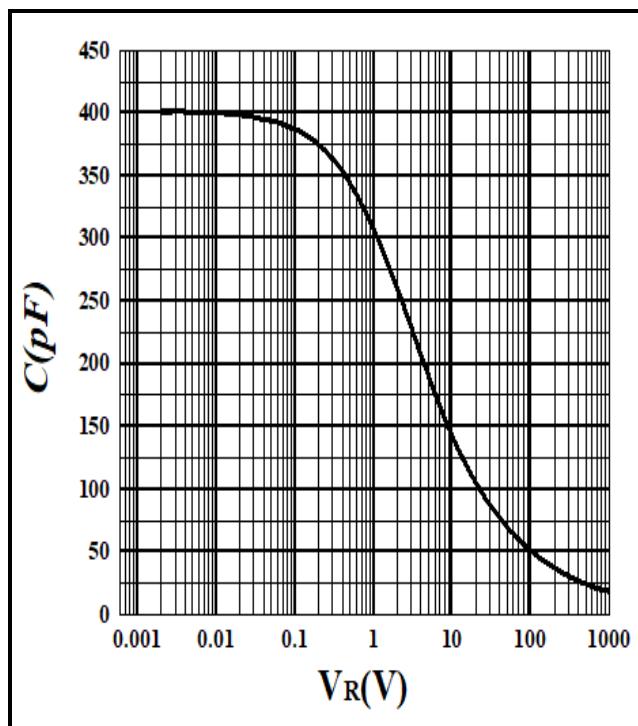


Figure 4. Capacitance vs. reverse voltage

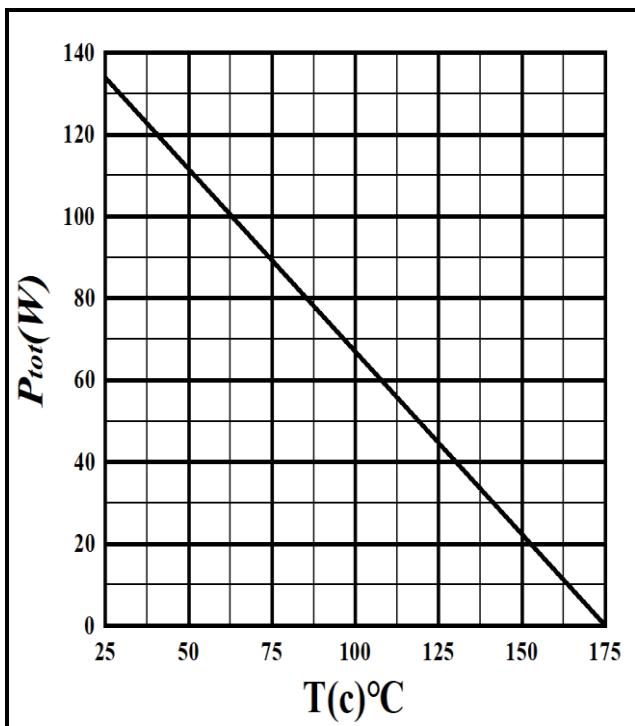


Figure 5. Power derating

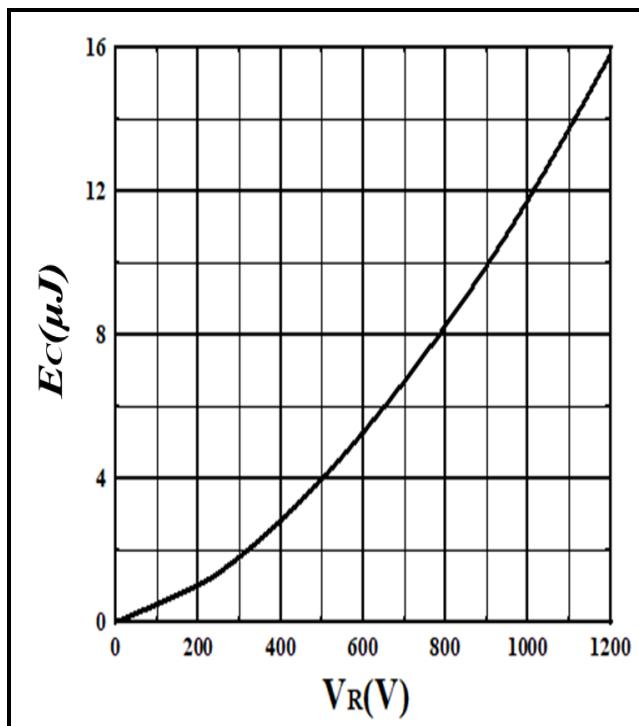


Figure 6. Capacitance stored energy

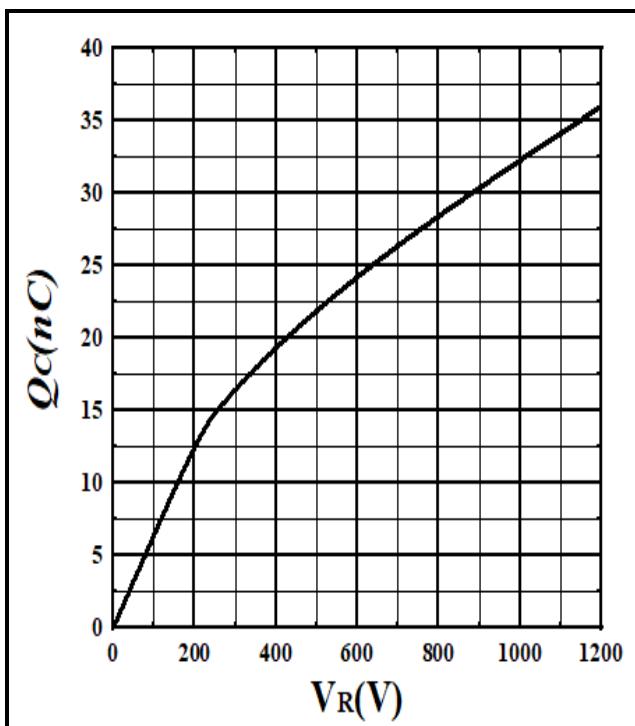


Figure 7. Total capacitance charge vs. reverse voltage



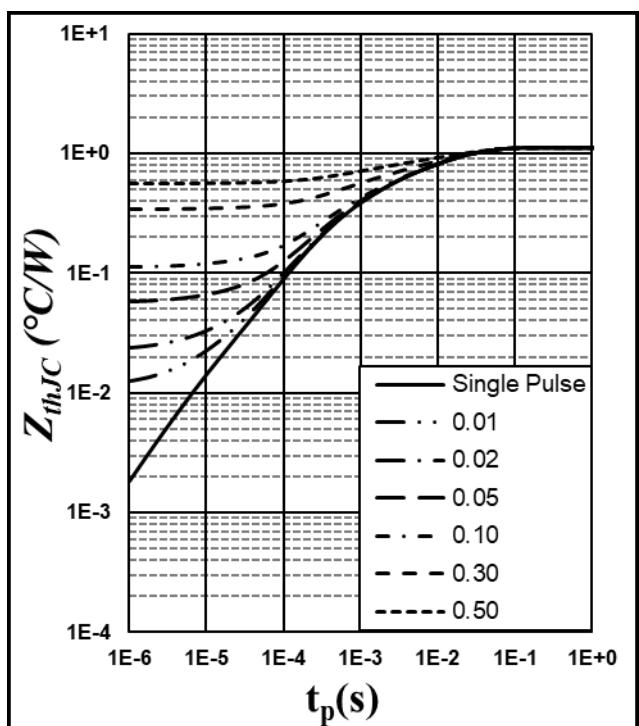


Figure 8. Transient Thermal Impedance  
(Junction-Case)


## Package Information




Top View




Side View



Bottom View



Front View

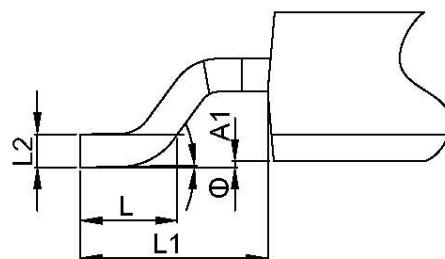


Lead of Side View

3: 1

Dimension unit: [mm]			
Symbol	Min	Nom	Max
A	2.20	2.30	2.38
A1	0	-	0.127
A2	0.97	1.07	1.17
b	0.68	0.78	0.90
b1	5.20	5.33	5.46
c	0.43	0.53	0.61
D	5.98	6.10	6.22
D1	5.30 REF		
E	6.40	6.60	6.73
E1	4.63	-	-
e	2.286 BSC		
H	9.40	10.10	10.50
L	1.38	1.50	1.75
L1	2.743 REF		
L2	0.51 BSC		
L3	0.88	-	1.28
θ	0°	-	8°

## Recommended Solder Pad Layout

Note: All dimensions are in mm

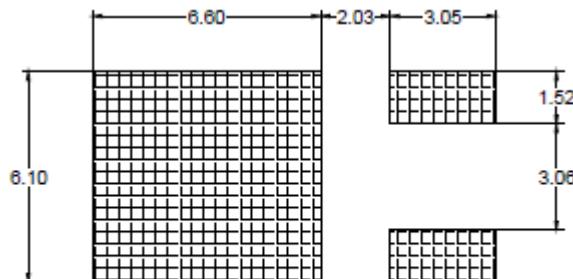

TO-252-2L

## Ordering Information

Part number	ADS120J005D3-ASARH
Package	TO-252-2L
Unit quantity	2500 EA
Packing type	Tape & Reel

## Important Notices – Read Carefully

Before you use our products, you are requested to carefully read this document and fully understand its contents. Sanan Semiconductor Co., Ltd. shall not be in any way responsible or liable for failure, malfunction or accident arising from the use of Sanan's products.

Sanan Semiconductor Datasheets are subject to change. Information presented in this document is from the characterization of engineering lots. Sanan Semiconductor Co., Ltd reserves the right to change limits, test conditions, and dimensions without notice. Information contained in this document are typical values and shall in no event be regarded as a guarantee of characteristics. With respect to any information regarding the application of the product, Sanan hereby disclaims all warranties and liabilities of any kind. The information in this document is exclusively for trained technical staff. It is the responsibility of the customer's technical department to decide the suitability of the product in the customer's application and Sanan Semiconductor Co., Ltd assumes no responsibility or liability whatsoever for the use of the information contained in this document.

In case there is any clause in this document or in any other documents which is contradictory to this clause, this clause shall prevail. This clause shall survive after termination of this document.

## Warning

Due to technical requirements, Sanan's products may contain dangerous substances. For detailed information about the substance(s), please contact the Sanan office. Sanan Semiconductor Co., Ltd bears no responsibility for any damage whatsoever due to the substance(s) used in Sanan's products.

## Contact info

Website: <https://www.sanan-semiconductor.com/>  
<https://www.sanan-semiconductor.com/en>